

# Quadratec® Spare Tire Mount Bike Rack

Installation Manual: Designed for Jeep '76-'19  
CJ, YJ, TJ, JK and JL Wrangler Vehicles  
#92034.1007



**⚠ WARNING ⚠**

TO REDUCE RISK OF SERIOUS INJURY OR PROPERTY DAMAGE: READ ALL SAFETY MESSAGES AND UNDERSTAND ALL INSTRUCTIONS AND PROCEDURE *NOTICES* BEFORE ATTEMPTING TO INSTALL OR USE THIS PRODUCT. FOLLOW ALL INSTRUCTIONS AND WARNINGS WITH PRODUCT & VEHICLE OWNERS MANUAL.

**⚠ CAUTION ⚠**

RISK OF EYE INJURY! SAFETY GLASSES MUST BE WORN AT ALL TIMES WHILE INSTALLING OR MAINTAINING THIS PRODUCT. TORQUE AND RECHECK FASTENERS AFTER 250 MILES AND FREQUENTLY THEREAFTER. DO NOT USE IF DAMAGED.

**⚠ CAUTION ⚠**

MAKE CERTAIN BICYCLES ARE PROPERLY SECURED BEFORE DRIVING ON PUBLIC ROADS. FAILURE TO DO SO COULD CAUSE PROPERTY DAMAGE OR PERSONAL INJURY.



**The Trusted Source**

**A Few Words About Product Safety:**

Your Spare Tire Mount Bike Rack is intended to enhance the utility and enjoyment of your off road capable vehicle. Before installation, please take a moment to review the following safety

information and installation instructions. Important safety information is generally preceded by one of three signal words indicating the relative risk of injury. The signal words mean:

<b>⚠ WARNING ⚠</b>	a hazardous situation which, if not avoided, could result in death or serious injury. You CAN be KILLED or SERIOUSLY HURT if you don't follow instructions.
<b>⚠ CAUTION ⚠</b>	a hazardous situation which, if not avoided, could result in minor or moderate injury. You CAN be moderately HURT and also may suffer property damage if you don't follow instructions.
<b>NOTICE</b>	Careful attention is required to this instruction or operation but does generally not relate to personal injury. Damage to your Quadratec® product or other property may result if you don't follow instructions.

**Before You Begin Installation:**

Congratulations on your purchase of Spare Tire Bike Rack for Wrangler vehicles. When unpacking, check to make sure all parts are included and not damaged due to shipping.

Regarding Bike Rack Safety: Always check that the rack and bicycles are securely mounted on your vehicle. Failure to do so could cause property damage or personal injury.

If any part is missing or broken, please call Customer Service at 800-745-6037 as soon as possible.

Thank you again for your purchase and let's start the installation process.

<b>⚠ CAUTION ⚠</b>	<b>TO REDUCE RISK OF SERIOUS INJURY OR PROPERTY DAMAGE: INSTALL ACCORDING TO INSTRUCTIONS. TORQUE AND RECHECK FASTENERS AFTER 250 MILES AND FREQUENTLY THEREAFTER. INSPECT AND DO NOT USE RECEIVER/RACK IF DAMAGED.</b>
<b>⚠ CAUTION ⚠</b>	<b>ALWAYS FOLLOW ALL SAFETY WARNINGS, CAUTIONS AND NOTICES IN THE INSTALLATION INSTRUCTIONS AND DOCUMENTATION THAT CAME WITH YOUR BIKE RACK. THIS DOCUMENT ONLY REFERS TO BIKE RACK ASSEMBLY AND INSTALLATION.</b>
<b>⚠ CAUTION ⚠</b>	<b>MAKE CERTAIN BICYCLES ARE PROPERLY SECURED BEFORE DRIVING ON PUBLIC ROADS. FAILURE TO DO SO COULD CAUSE PROPERTY DAMAGE OR PERSONAL INJURY.</b>



**The Trusted Source**

**Installation Hardware:**



**PARTS LIST:**


A) Main Rack Assembly	Qty 1
B) Cross Brace	Qty 1
C) Rubber Retainer Straps	Qty 4
D) Foam Rack Pad	Qty 2
E) Foam Pedal Pads	Qty 2
F) Spare Tire Retension Strap	Qty 1
G) Retaining Strap with Eyelet	Qty 1
H) Bike Retaining Strap w/Buckle	Qty 1
I) M6 Button Head Bolts	Qty 2
J) M6 Flat Washers	Qty 4
K) M6 Nylock Nuts	Qty 2

**INCLUDED TOOLS:**

L) 5mm Hex Wrench	Qty 1
M) 4mm Hex Wrench	Qty 1
N) 10mm Open End Wrench	Qty 1

**REQUIRED TOOLS:**

Safety Glasses

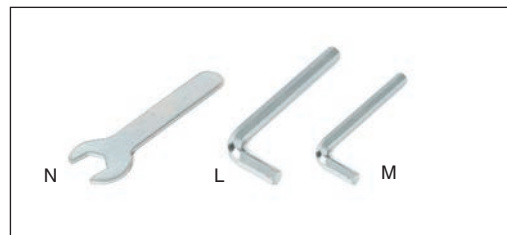

**The Trusted Source**

**Bike Rack Assembly:**



*Put on safety glasses. Loosen upper knobs and unfold the bike rack arm to approximately 90 degrees. (FIG1)*



*Gently tighten knobs and ensure the teeth on the hinges engage evenly. (FIG2)*



*Install the round end of the rubber retaining straps by pulling them over the square retaining tabs on the cradles. (FIG3)*



*Loosen the lower knobs and rotate the retaining arms evenly. (FIG4)*




**The Trusted Source**

## **Bike Rack Assembly & Installation:**



*Locate the cross brace and install it between the retaining arms. Secure both sides with a button head bolt 2 washers and a nylock nut. Tighten with a 4mm hex key and a 10mm wrench. (FIG5)*

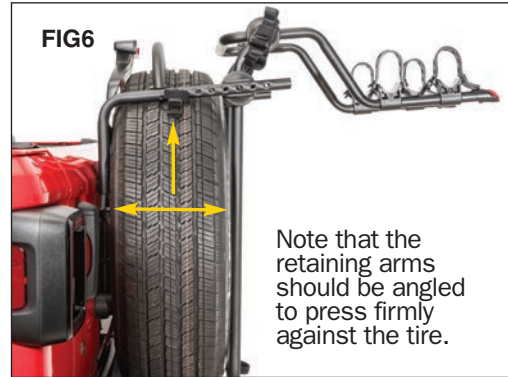

*Place the rack over your spare tire. The width of the rack and the location of the retaining straps can be adjusted to multiple locations depending on the size of your tire. Adjust the width of the rack so that it fits snugly over the tire. The retention strap buckle should be located near the middle of the tread. (FIG6)*



*Install the supplied foam pads (D) on the rack where it contacts the sides of the tire. (FIG7)*



*Loop the spare tire retaining strap (H) through the buckle, around the tire and thread it back through the retaining buckle on opposite side. Snug the strap. (FIG8)*



**The Trusted Source**

**Bike Rack Installation:**



*Attach the tailgate retaining straps to the bottom of the tailgate on both sides and tighten the buckles. (FIG9)*



*Excess strap can be stowed using the attached hook and loop retainers. (FIG10)*



*Using the provided loose retaining strap, (with eyelet) (G) loop the strap around the bottom crossbar of the rack and through the wheel and secure it to the buckle at the bottom of the rack. (FIG11)*



*Adjust the angle of the bike rack arm if needed. The arm should be angled up slightly. Position the Bike cradles as needed for your bike and snug the Allen bolts with a 5mm hex wrench. Final adjustment of the bike cradles can be made later when bikes are installed. (FIG12)*



**The Trusted Source**

**Bike Rack Installation:**



Place the bike in the cradles as shown. Pull the rubber retaining straps over the frame of the bike and secure it on the rectangular hook. (FIG13)



Install the supplied foam pedal protectors (E) if desired. Thread the provided safety strap (H) around the back of the vertical tubes of the rack and continue to thread the strap through both wheels and secure it using the buckle. (FIG14)



Folds away when not in use



**The Trusted Source**

# Quadratec® Exclusive Three Year Limited Warranty

Your Quadratec® branded accessories are covered by the following **Limited Warranty** provided exclusively by Quadratec, Inc., 1028 Saunders Lane, West Chester PA 19380.

This **Limited Warranty** is the only warranty made in connection with your purchase. Quadratec neither assumes nor authorizes any vendor, retailer or other person or entity to assume for it any other obligation or liability in connection with this product or **Limited Warranty**. This **Limited Warranty** does not apply and is not cumulative to any accessory or part distributed by Quadratec for which the Manufacturer provides a separate written warranty.

**What is Covered:** Subject to the terms, exclusions and limitations herein and with respect only to Quadratec branded accessories first sold in the United States, Quadratec warrants to the initial retail purchaser only that your Quadratec accessory shall be free of defects in material and workmanship: **for a period of three (3) years from date of retail purchase.**

This **Limited Warranty** is not assignable and shall terminate upon sale of the vehicle upon which the Quadratec accessory is installed or other transfer third persons.

All other warranties are hereby disclaimed, except to the extent prohibited by applicable law in which case any implied warranty of merchantability or fitness for a particular purpose on this product is limited to 3 year from date of initial retail sale. Quadratec reserves the rights to: (a.) require invoice or other proof your accessory is within the terms of this **Limited Warranty** as a condition of warranty service and, (b.) make future revisions to this product and **Limited Warranty** without prior notice or obligation to upgrade your product.

**What is Not Covered:**  
Your Quadratec **Limited Warranty** does not cover products or parts Quadratec determines to have been damaged by or subjected to:

(a.) installation damage, alteration, modification, combination with other parts, failure to maintain or improper repair or service, (b.) normal wear & tear, cosmetic damage or damage from moisture or water immersion, (c.) Acts of God, accidents, misuse, negligence, inadequate mounting or impact with vehicle(s), obstacles or other aspects of the environment, (d.) theft, vandalism or other intentional damage.

**Remedy Limited to Repair/Replacement:**  
The exclusive remedy provided hereunder shall, upon Quadratec inspection and at Quadratec's option, be either repair or replacement of product or parts (new or refurbished) covered under this **Limited Warranty**. Customers requesting warranty consideration should first contact Quadratec to obtain a RGA number (610-701-3336). All labor, removal, shipping and installation costs are customer's responsibility.

#### **Other Limitations - Exclusion of Damages - Your Rights Under State Law:**

In consideration of the purchase price paid, neither Quadratec nor any independent Quadratec distributor/licensee are responsible for any time loss, rental costs, or for any incidental, consequential, punitive or other damages you may have or incur in connection with any part or product purchased. Your exclusive remedy hereunder for covered parts is repair/replacement as described above.

This **Limited Warranty** gives you specific rights. You may also have other rights that vary from state to state. For example, some states do not allow limitations of how long an implied warranty lasts and /or do not allow the exclusion or limitation of incidental or consequential damages, so the limitations and exclusions herein may not apply to you.

©Quadratec, Inc. 2019. All Rights Reserved.  
6.10.19 A4 Version

Part # 12999.3135



**The Trusted Source**